

# Proximity Card Reader


## SRT-1356 Series

### Overview:

SRT-1356 series are compact sized manual proximity card reading/writing modules which support Mifare, ISO-1443A, B & ISO-15693 cards under 13.56MHz secure transaction.

### Features:

- ❖ Single power supply
- ❖ T=CL protocol
- ❖ Including WDT
- ❖ Compact & user friendly design
- ❖ Low cost with reliable quality
- ❖ Possible customization for OEM
- ❖ Possible Anti-collision

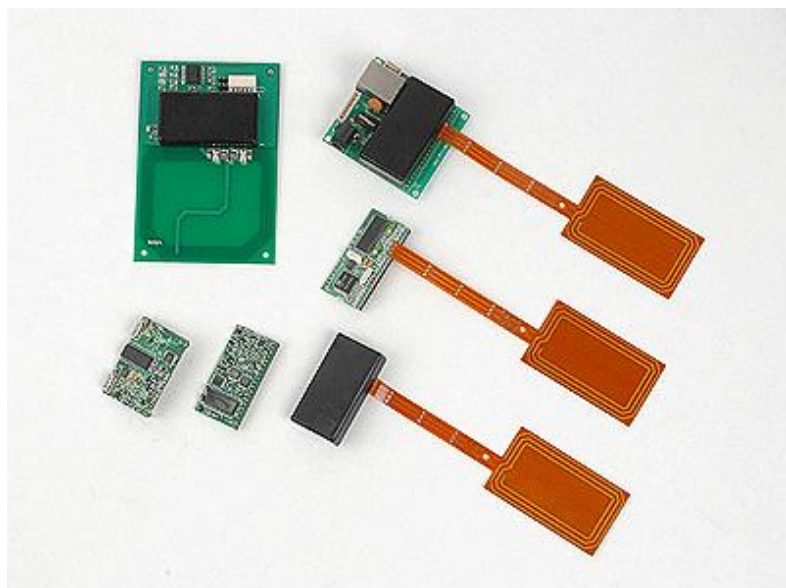

### Technical Specifications:

	Specification		Specification
Voltage	5VDC +/- 5%	Consumption	Max. 200mA
Interface	RS-232C Ethernet		
R Distance	~50mm	Frequency	13.56KHz
PICC	ISO 1443 A/B, ISO 15693, Mifare	Temperature	-10°C ~ 70°C

### Ordering Options:

PICC Type (A)	ANT' (B)
U: serial no. read M: Mifare R/W A: Type-A R/W B: Type-B R/W	F: FPCB(RS-232, TTL) R: PCB (RS-232, TTL) T: PCB (RS-232) N: None (RS-232, TTL)
P: PICO-TAG R/W S: SR-176 R/W L: Mifare Ultralight R/W	



5150 Campus Drive Plymouth Meeting, PA 19462 USA  
 Tel: 610-825-7090 1-800-523-0253 Fax: 610-834-7708  
 E-mail: sales@pdiscan.com Internet: www.pdiscan.com