
Manual Insertion Reader KDR-3000 Series


Overview:

Reads single or dual track magnetic stripe with ISO standards. This reader is especially useful in gaming applications and for a host of applications where space is limited. It functions reliably over a various range of operating speed and operation is extremely simple. The reader is intended to be mounted onto the front panel of the user's terminal or other equipment.

Features:

- Proven & Tested to Last a Minimum of 1,000,000
- ✤ ISO-1,2,3 Single or Dual Track Read
- Low Power Consumption: Max. 8mA
- ✤ TTL, RS-232C and USB Interface
- GDS Protocol is Available (KDU-3907 only)
- Card Present Switch
- Power Supply: DC 5V \pm 5%



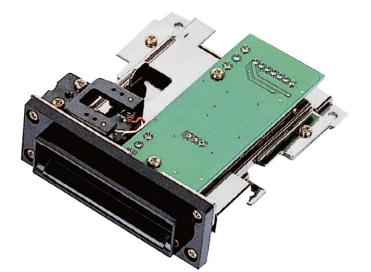

Applications:

- ATM
- Vending Machine
- Kiosk (information & payment)
- POS System

Model Name Configuration:

| KD | | - | 3 | | | |
|----|--------------------------------|---|---|---|--|------------|
| | R: TTL M: RS-232C U: USB | | | 7: Metal Housing / Micro Switch 8: Plastic Housing / Micro Switch 9: Customized | 1: ISO-1 track 2: ISO-2 track 3: ISO-3 track 5: ISO-1&2 track 6: ISO-2&3 track | 0: Default |



5150 Campus Drive · Plymouth Meeting, PA 19462 · USA Tel: 610-825-7090 · 1-800-523-0253 · Fax: 610-834-7708 E-mail: sales@pdiscan.com · Internet: www.pdiscan.com