


Proximity Card Reader SRT-1356 Series

Overview:

SRT-1356 series are compact sized manual proximity card reading/writing modules which support Mifare, ISO-1443A, B & ISO-15693 cards under 13.56MHz secure transaction.

Features:

- ❖ Single Power Supply
- ❖ T = CL Protocol
- ❖ Including WDT
- ❖ Compact & User Friendly Design
- ❖ Low Cost with Reliable Quality
- ❖ Possible Customization for OEM
- ❖ Possible Anti-Collision

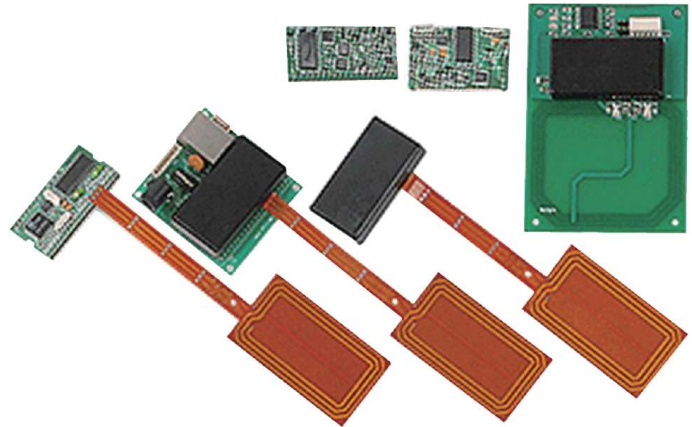

Technical Specifications:

	Specification		Remarks
Voltage	5VDC +/- 5%	Consumption	Max. 200mA
Interface	RS-232C Ethernet		
R Distance	~50mm	Frequency	13.56KHz
PICC	ISO 1443 A/B, ISO 15693, Mifare	Temperature	-10°C ~ 70°C

Ordering Options:

PICC Type (A)		ANT' (B)
U: serial no. read	P: PICO-TAG R/W	F: FPCB(RS-232, TTL)
M: Mifare R/W	S: SR-176 R/W	R: PCB (RS-232, TTL)
A: Type-A R/W	L: Mifare Ultralight R/W	T: PCB (RS-232)
B: Type-B R/W		N: None (RS-232, TTL)